



Specification

Model No	AMK716-PB	AMK716-CB
Construction	Heavy-duty steel	
Drawer design	1U, Dual slide rail LCD KB drawer for 19" cabinet Enable independent extraction of LCD or KB alone	
Display	17", 1280x 1024 resolution with tempered glass Option: 19", 1280x 1024 with tempered glass	
Protection	Tempered glass protect LCD screen	
Physical security	Key locking mechanism	
KVM switch	16 port PS2 KVM switch	16 port Combo KVM switch
Port connection	Daisy chain up to 8 levels to support up to 128 sets	
Port selection	16x Front push buttons, OSD Manu, Hotkey	
LED indication	Power LED indicates a computer is connecting Operation LED indicates the port has been selecting	
Keyboard	Industrial keyboard with touchpad Option KB: CH, FR, GR, IT, JP, KR, PT, RU, SP, UK, US	
Power supply	Built-in 60W, 90~264VAC, Operating temp.: -20~70°C	
Power consumption	3 watts stand-by, 25 watts in-use	
Dimension	442.4x 44x 590mm (Wx Hx D)	
Weight	13 kgs	
KVM cable	16x 1.8m PS2 KVM cable	16x 1.8m USB KVM cable

Environmental Factors


	Operating	Non-Operating
Temperature	0°C~50°C	-20°C~60°C
Relative Humidity	10%~90%	10%~95%
Approval	CE, FCC, RoHS	

Features

- Meets EIA310c & IEC-3 specification
- 1U, Dual slide rail, 17" or 19" LCD Keyboard drawer
- 16 port PS2 or Combo KVM switch
- Built-in 17" LCD monitor, 1280x 1024 resolution
- Option: 19", 1280x 1024 LCD monitor
- Industrial keyboard with touchpad
- Includes a key-locking mechanism to prevent unauthorized access
- Built-in rail self-locking device
- Tempered glass protect LCD screen

KVM switch

- 16 port PS2/ Combo KVM switch
- Support password protection and server name
- Support Windows, DOS, Netware, Unix, Linux, IMAC, Power MAC and Sun Micro systems with USB
- Hot plug- add or remove connected computer without powering off the KVM switch or computer
- No software required. Easy computer selection via Front push buttons, Hot Key, OSD manu
- Firmware upgrades to all the chained KVM switch via the KVM cable connects to port 1 (Combo KVM only)
- Auto scan mode. Easy to monitor server operation
- Superior video bandwidth up to 200MHz
- Keyboard status restored upon server switched
- LED display for status monitor
- Buzzer sound for server switched confirmation

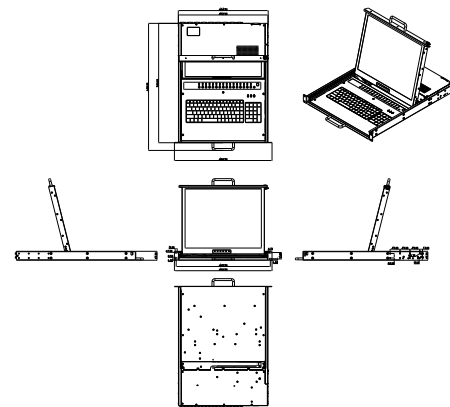

Ordering Information

AMK716-17PBUS

1U, dual rail, 17" LCD, 16-port PS2 KVM with 16x 1.8m PS2 cables

AMK716-17CBUS

1U, dual rail, 17" LCD, 16-port Combo KVM with 16x 1.8m USB cables

AMK716-19PBUS

1U, dual rail, 19" LCD, 16-port PS2 KVM with 16x 1.8m PS2 cables

AMK716-19CBUS

1U, dual rail, 19" LCD, 16-port Combo KVM with 16x 1.8m USB cables

Option:

80W, 24~48VDC power supply

1.8m, 3.0m, 5.0m KVM cable

Keyboard layout: CH, FR, GR, IT, JP, KR, PT, RU, SP, UK, US