



Features

- Meets EIA310c & IEC-3 specification
- 1U, Single slide rail, 17.3" LCD keyboard drawer with 4-port DP KVM switch
- Built-in 17.3" LCD monitor, 1920x 1080 resolution
Option: 17.3", 1600x 900 LCD monitor
- Industrial keyboard with touchpad
- 1U, 521 mm short depth and lightweight
- 2 thumb screws to secure 17.3" LCD monitor
- Industrial keyboard with touchpad
- Built-in rail self-locking device
- Tempered glass protect LCD screen

KVM switch


- 4 port DisplayPort KVM switch
- Computer selection via front push buttons, hotkey
- Support Windows, DOS, Netware, Unix, Linux, IMAC, Power MAC and Sun Micro systems with USB
- Hot plug- add or remove connected computer without powering off the KVM switch or computer
- No software required. Easy computer selection via Front push buttons, Hot Key, OSD manu
- Auto scan mode. Easy to monitor server operation

Specification

Model No	AMK504
Construction	Heavy-duty steel
Drawer design	1U, single slide rail LCD KB drawer for 19" rackmount
Display	17.3", 1920x 1080 resolution with tempered glass Option: 17.3", 1600x 900 with tempered glass
Protection	Tempered glass protect LCD screen
Physical security	2 thumb screws to secure LCD monitor
KVM switch	4 port DisplayPort KVM switch
Port connection	4* DisplayPort, 4* audio, 4* Microphone, 4* USB
Port selection	4x Front push buttons, Hotkey
LED indication	USB LED indicates a computer is connecting DP LED indicates the port has been selecting
Keyboard	Industrial keyboard with touchpad Option KB: CH, FR, GR, IT, JP, KR, PT, RU, SP, UK, US
Power supply	Built-in 60W, 90~264VAC, Operating temp.: -20~70°C
Power consumption	3 watts stand-by, 25 watts in-use
Dimension	442.4x 44x 521.6mm
Weight	11 kgs
KVM cable	4* DP/ USB/ audio-microphone cables

Environmental Factors

	Operating	Non-Operating
Temperature	0°C~50°C	-20°C~60°C
Relative Humidity	10%~90%	10%~95%
Approval	CE, FCC, RoHS	

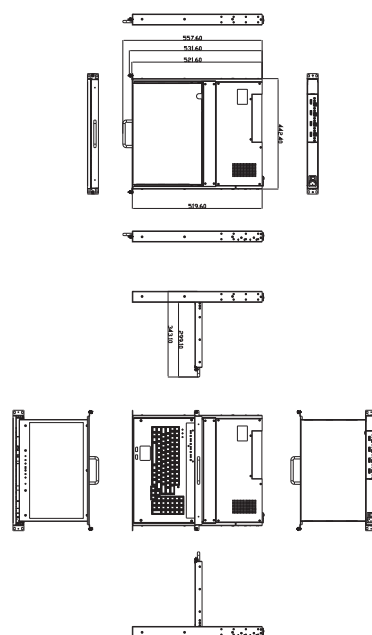

Ordering Information

AMK504-174BUS

1U, 17.3", 1600x 900, 4-port DP KVM, 4x DP/USB/audio cables

AMK504-17W4BUS

1U, 17.3", 1920x 1080, 4-port DP KVM, 4x DP/USB/audio cables

AMK504-17U4BUS

1U, 17.3", 3840x 2160 (4K), 4-port DP KVM, 4x DP/USB/audio cables

Option:

80W, 24~48VDC power supply

-48VDC power supply