

# AMK808-D 8 port DVI KVM LCD keyboard drawer



## Specification

<b>Model No</b>	<b>AMK808-D</b>	
Construction	Heavy-duty steel	
Drawer design	1U, single slide rail LCD KB drawer for 19" cabinet	
Display	17", 1280x 1024 resolution with tempered glass Option: 19", 1280x 1024 with tempered glass	
Protection	Tempered glass protect LCD screen	
Physical security	Key locking mechanism	
KVM switch	8 port DVI KVM switch	
LED indication	Online LED indicates a computer is connecting Hub LED indicates the USB Hub in which port. Audio LED indicates the audio in which port. 7-seg port LED indicates the current operation PC port	
Keyboard	Industrial keyboard with touchpad Option KB: CH, FR, GR, IT, JP, KR, PT, RU, SP, UK, US	
Power supply	Built-in 60W, 90~264VAC, Operating temp.: -20~70°C	
Power consumption	3 watts stand-by, 25 watts in-use	
Dimension	442.4x 44x 590mm (Wx Hx D)	
Weight	13 kgs	
KVM cable	8x DVI cables, 8x USB cables, 8x audio cables	

## Environmental Factors


	Operating	Non-Operating
Temperature	0°C~50°C	-20°C~60°C
Relative Humidity	10%~90%	10%~95%
Approval	CE, FCC, RoHS	

## Features

- Meets EIA310c & IEC-3 specification
- 1U, Single slide rail, 17" or 19" LCD Keyboard drawer  
8 port DVI KVM switch
- Built-in 17" LCD monitor, 1280x 1024 resolution  
Option: 19", 1280x 1024 LCD monitor
- Industrial keyboard with touchpad
- Includes a key-locking mechanism to prevent unauthorized access
- Built-in rail self-locking device
- Tempered glass protect LCD screen

## KVM switch

- One USB console controls 8 Single Link DVI computers and 2 additional USB 2.0 devices
- Supported USB HUB switching independent
- Supported audio output switching independent
- Support Windows, DOS, Netware, Unix, Linux, IMAC, Power MAC and Sun Micro systems with USB
- Hot plug- add or remove connected computer without powering off the KVM switch or computer
- No software required. Easy computer selection via Front push buttons, Hot Key
- Firmware upgrades to DVI KVM switch via the USB cable connect between KVM port 1 and PC
- Auto scan mode. Easy to monitor server operation
- Keyboard status restored when switching computers

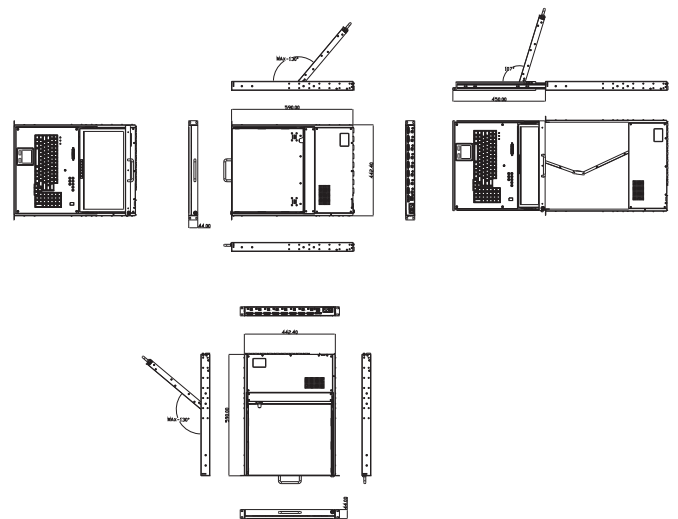

## Ordering Information

### AMK808-17DBUS

1U, 17", 1280x 1024, 8-port DVI KVM with 8x DVI/USB/audio cables

### AMK808-19DBUS

1U, 19", 1280x 1024, 8-port DVI KVM with 8x DVI/USB/audio cables